


CROWN
 PRODUCTS COMPANY, INC.

6390 Phillips Highway
 Jacksonville, FL 32216
 Phone (904) 737-7144

DIMENSIONAL DATA

SIZES: 3" THROUGH 8" DIAMETER
 8 FT. SECTIONS COMPRESSED TO 38"

FABRICATION DATA

CONSTRUCTION:
 .005" THICK ALUMINUM, ALLOY 1100
 TRIPLE LOCK SEAM.

RECOMMENDED BEND RADIUS:
 1-1/2 X DIAMETER TO CENTER LINE OF DUCT.

TEMPERATURE RANGE:
 -60 DEG. F. TO +600 DEG. F.


MAXIMUM OPERATING PRESSURE:
 10" W.C. POSITIVE & 12" W.C. NEGATIVE; 5500 FPM

FEATURES

SPECIFICATION DATA SHEET

Date: 01/19/06 Drawn by: Don. JR.

MODEL No. 107
 ALUMINUM FLEXIBLE PIPE

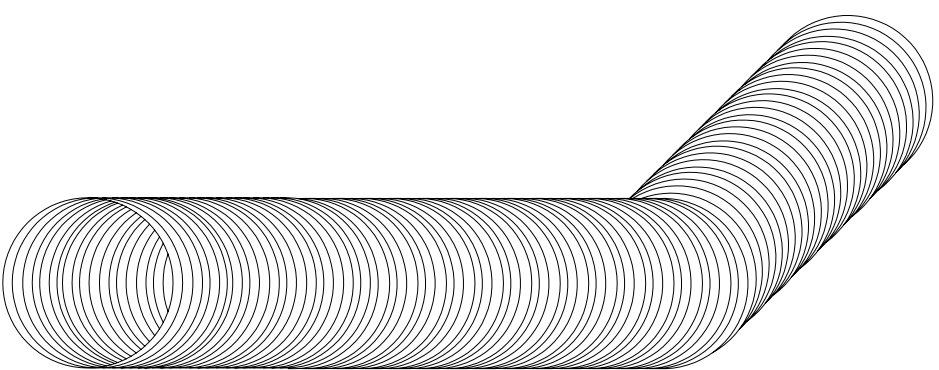

OPTIONS

NO.105 FLEXELL PIPE: 8FT. SECTIONS LISTED UL 181: CLASS 0 AIR DUCT, MEETS REQUIREMENTS - NPPA BULLETIN 90-A.

SPECIAL NOTES

NOT RECOMMENDED FOR RANGE HOOD DUCT. COMPRESSED ALUMINUM PIPE IS NOT COVERED BY THE U.L. 181 TEST PROCEDURE.