



6390 Phillips Highway
 Jacksonville, FL 32216
 Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 1298-FL

SLANTED DUCT BOARD BOX, R-6.0

Date: 5/27/03 rev.

Drawn by: DON.JR.

DIMENSIONAL DATA

OUTER BOX DIMENSION IS 2" GREATER THAN REGISTER DIMENSION.

| REGISTER DIMENSION | "A" DIMENSION |
|--------------------------------------|---------------|
| 8"x4", 10"x4", 12"x4", 14"x4" | 8" |
| 6"x6", 8"x6", 10"x6", 12"x6", 14"x6" | 9-1/2" |
| 8"x8", 10"x8", 12"x8", 14"x8" | 11" |
| 10"x10", 12"x10" | 12-1/2" |
| 12"x12" | 14" |
| 14"x14" | 15-1/2" |

FABRICATION DATA


OUTER FRAME FABRICATED FROM 30 GAUGE GALVANIZED STEEL.
 DUCT BOARD TOP AND SIDES.

FEATURES

R-6.0 INSULATION.
 SOLID CORNERS WITH HANGER HOLES.
 1/2" DRYWALL FLANGE.
 HOLE CLUSTER FOR REGISTER ATTACHMENT.
 SLANTED DUCT BOARD TOP ALLOWS FOR VARIOUS COLLAR INLET SIZES.
 BLACK INTERIOR.

OPTIONS

No. 1298 SLANTED DUCT BOARD BOX, R-4.2 INSULATION, BLACK INTERIOR.

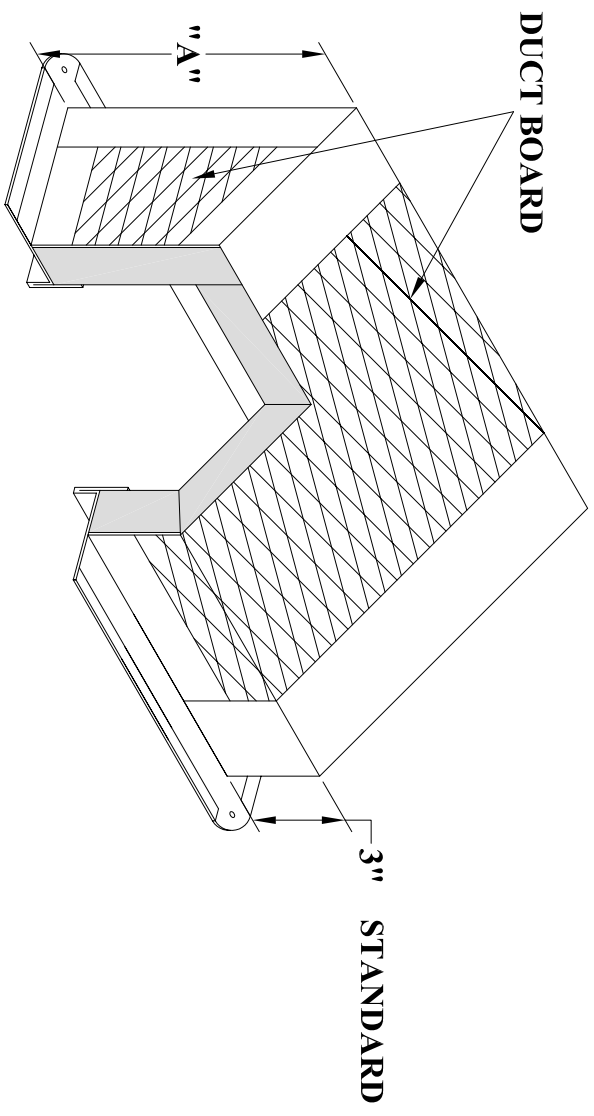

SPECIAL NOTES

INTERNAL INSULATION USED MEETS THE REQUIREMENTS OF ASTM C 1338 (FORMERLY ASTM C 665) STANDARD TEST METHOD FOR FUNGI RESISTANCE.