



6390 Philips Highway
 Jacksonville, FL 32216
 Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 1298-FLG

**SLANTED DUCT BOARD BOX, R-6.0
 WITH THERMA SEAL GASKET**

Date: 04/18/12

Drawn by: M.D.C

DIMENSIONAL DATA

OUTER BOX DIMENSION IS 3" GREATER THAN REGISTER DIMENSION.

REGISTER DIMENSION	"A" DIMENSION
8" x 4", 10" x 4", 12" x 4", 14" x 4"	8"
6" x 6", 8" x 6", 10" x 6", 12" x 6", 14" x 6"	9-1/2"
8" x 8", 10" x 8", 12" x 8", 14" x 8"	11"
10" x 10", 12" x 10"	12-1/2"
12" x 12"	14"
14" x 14"	15-1/2"

FABRICATION DATA

OUTER FRAME FABRICATED FROM 30 GAUGE GALVANIZED STEEL.

DUCT BOARD TOP AND SIDES.

FEATURES

R-6.0 INSULATION.

SOLID CORNERS WITH HANGER HOLES.

1/2" DRYWALL FLANGE.

HOLE CLUSTER FOR REGISTER ATTACHMENT.

SLANTED DUCT BOARD TOP ALLOWS FOR VARIOUS COLLAR INLET SIZES.


BLACK INTERIOR.

GASKET AROUND REGISTER OPENING SEALS BOX WHERE IT PENETRATES BUILDING ENVELOPE.


OPTIONS

No. 1298 SLANTED DUCT BOARD BOX, R-4.2 INSULATION, BLACK INTERIOR.

DUCT BOARD

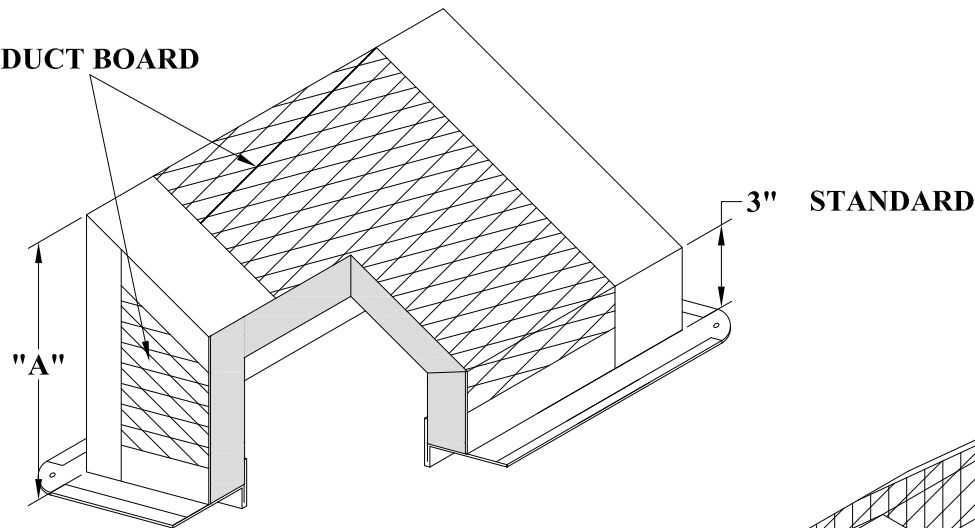

THERMA SEAL GASKET

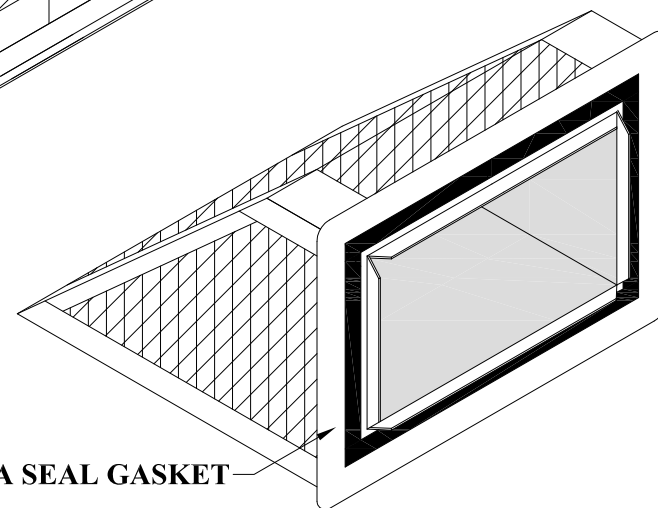

SPECIAL NOTES

INTERNAL INSULATION USED MEETS THE REQUIREMENTS OF ASTM C 1338 (FORMERLY ASTM C 665) STANDARD TEST METHOD FOR FUNGI RESISTANCE.

GASKET TESTED TO ASTM E-84-91. FLAME SPREAD LESS THAN 25, SMOKE DENSITY LESS THAN 50.