

6390 Philips Highway Jacksonville, FL 32216 Phone (904) 737-7144

SPECIFICATION DATA SHEET

Drawn by: M.D.C.

Date: 03/28/19 rev.

MODEL No. 3711

STRAIGHT TAKEOFF WITH PEEL-OFF PAPER GASKET

DIMENSIONAL DATA

SIZES: 4" THROUGH 20" DIAMETER

COLLAR LENGTH 6" - ALL SIZES

FABRICATION DATA

MATERIAL:

HOT DIPPED GALVANIZED STEEL SHEET PER ASTM-A653 CS TYPE B.

GAUGES:

4" THROUGH 8" = 28 GAUGE

9" THROUGH 14" = 26 GAUGE

16" THROUGH 20" = 24 GAUGE


AIR FLOW CHARACTERISTICS


BASED ON 700 F/M VELOCITY IN MAIN DUCT, 600 F/M VELOCITY IN BRANCH DUCT. DESIGN FRICTION LOSS OF .15" W.G. PER 100 FT. OF DUCT. PRESSURE LOSS IN EQUIVALENT FEET OF BRANCH DUCT = 25FT.

FEATURES

CONTINUOUS WELD LONGITUDINAL SEAM FOR NO AIR LEAKAGE AT 2" W.G. STATIC PRESSURE.

1 ½" WIDE FLANGE WITH PRE-DRILLED SCREW HOLES FOR EASE OF INSTALLATION. FLANGE HAS PEEL-OFF PAPER GASKET.

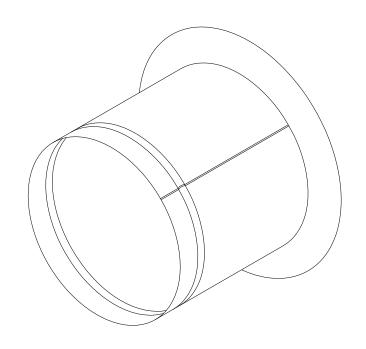



OPTIONS

SPECIAL NOTES

MADE TO MEET S.M.A.C.N.A. GAUGE STANDARDS. MAXIMUM 10" W.G. STATIC PRESSURE. (S.M.A.C.N.A. HVAC DUCT CONSTRUCTION STANDARDS, THIRD EDITION-2005)