



6390 Philips Highway
Jacksonville, FL 32216
Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 666-L

RECTANGULAR TO ROUND ADAPTER
WITH INTERNAL INSULATION

Date: 10/04/17

Drawn by: M.D.C.

DIMENSIONAL DATA

SIZES AVAILABLE: 4" x 4" THRU 30" x 30" ("A" x "B")

RECTANGULAR END: 3/16" OVERSIZED.

ROUND COLLAR: 1/8" UNDERSIZED.

3" DEEP RECTANGULAR END STANDARD.
EXTENDED DEPTHS AVAILABLE.

3" LONG ROUND COLLAR.

FABRICATION DATA

FABRICATED FROM HOT DIPPED GALVANIZED
STEEL OF LOCK FORMING QUALITY PER
ASTM-A653 CS TYPE B.

SIZES 4" x 4" THRU 24" x 24" = 28 GAUGE


SIZES 26" x 26" THRU 30" x 30" = 26 GAUGE

FEATURES

RECTANGULAR END IS STRAIGHT TO FIT
OVER GRILLE NECK.

ROUND COLLAR IS UNDERSIZED WITH BEAD
TO ACCEPT PIPE OR FLEX DUCT.

1/2", 1" OR 1 1/2" LINER INSTALLED AS REQUIRED.
LINER RECESSED 1/2" UP FROM RECTANGULAR
END.

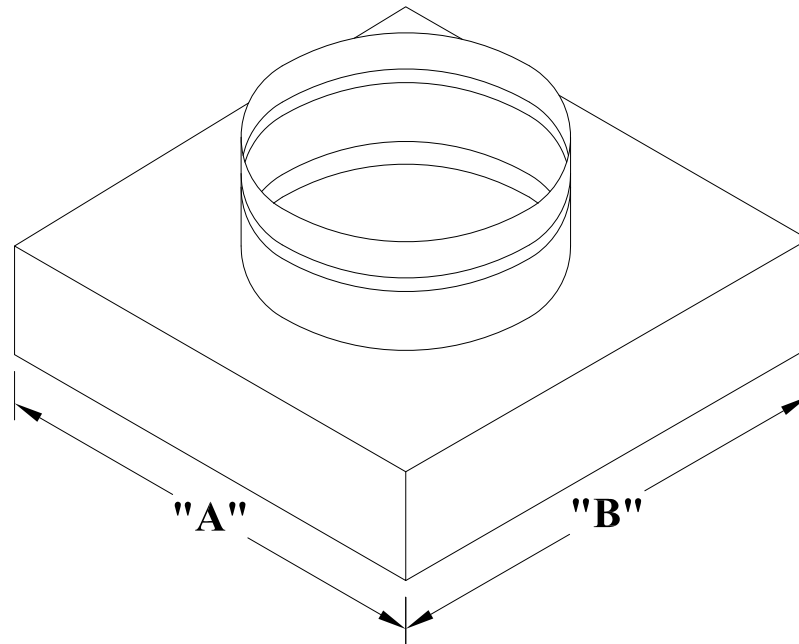

OPTIONS

OVAL COLLAR, NO COLLAR & CUSTOM SIZES
AVAILABLE.

SPECIAL NOTES

**ROUND COLLAR EXTENDS 5/8" INTO RECTANGULAR END. STANDARD 3" DEEP RECTANGULAR
END YIELDS ONLY 2-3/8" CLEARANCE.**