



6390 Philips Highway  
Jacksonville, FL 32216  
Phone (904) 737-7144

**SPECIFICATION DATA SHEET**

**MODEL No. 101**

**GALVANIZED SNAPLOCK PIPE**

Date: 07/11/22 rev. Drawn by: J.E.P.

**DIMENSIONAL DATA**

SIZES AVAILABLE: 3" THROUGH 24" DIAMETER

**FABRICATION DATA**

MATERIAL: GALVANIZED STEEL SHEET OF LOCK FORMING QUALITY PER ASTM-A653 CS TYPE B.



DIAMETER	GAUGES AVAILABLE
3"	30 AND 28
4"	30, 28, 26
5" - 9"	30, 28, 26, 24
10"	30, 28, 26, 24, 22
12" - 16"	28, 26, 24, 22
18" - 20"	26, 24, 22
22" - 24"	24 AND 22

CONSULT CROWN CATALOG FOR AVAILABLE JOINT LENGTHS.

**FEATURES**

LONGITUDINAL SEAM:  
30 GA. - 24 GA. = REEVES SNAPLOCK (RL-6B)  
22 GA. = ACME LOCK (HAMMERLOCK)

TRANSVERSE CONNECTIONS:  
CRIMP AND BEAD MALE CONNECTION  
STRAIGHT FEMALE CONNECTION

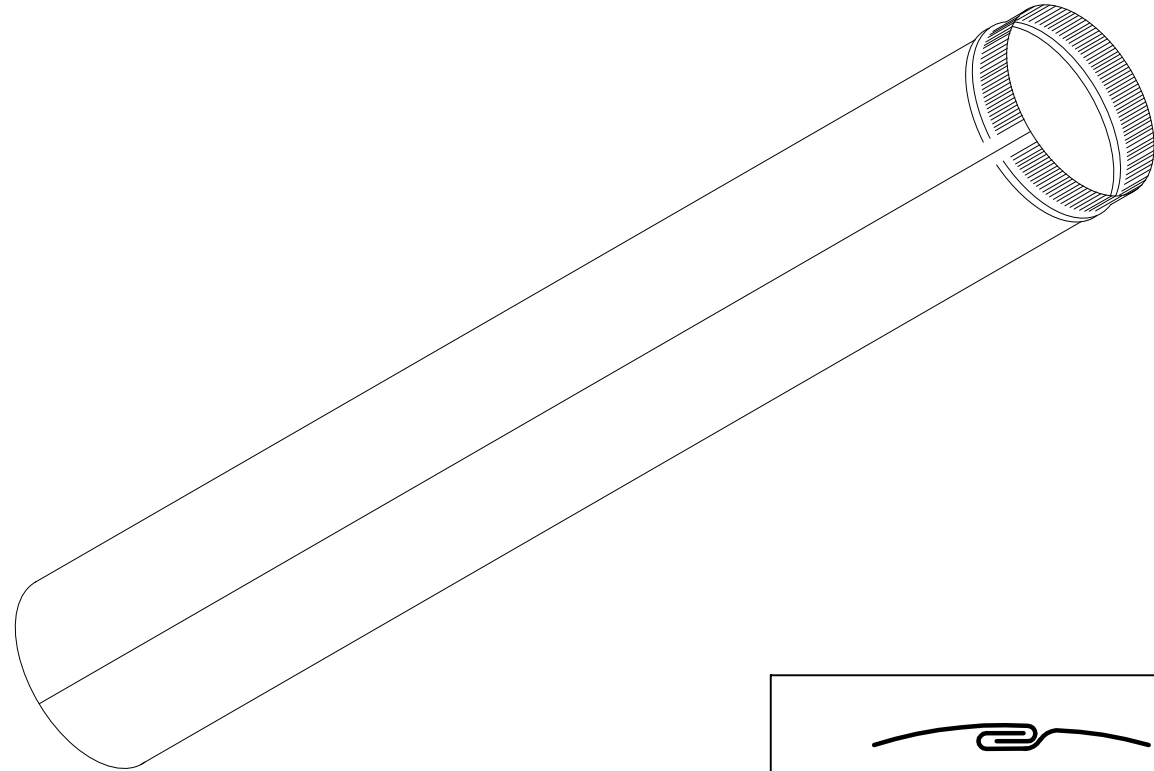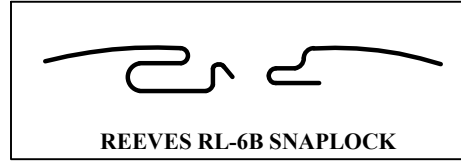

**OPTIONS**

ALUMINUM AND STAINLESS STEEL PIPE IS AVAILABLE IN VARIOUS GAUGES AND DIAMETERS.

AVAILABLE IN GALVANNEALED STEEL (PAINTABLE) PER ASTM A653 COATING DESIGNATION A40.

**SPECIAL NOTES**

U.L. FIRE HAZARD CLASSIFICATION, CLASS "0" AIR DUCT. FLAME SPREAD ZERO, SMOKE DEVELOPED ZERO UP TO 10" POSITIVE STATIC PRESSURE PER SMACNA THIRD EDITION 2005:

04" - 14"	28 GA
16" - 18"	26 GA
20" - 24"	24 GA