



6390 Philips Highway
Jacksonville, FL 32216
Phone (904) 737-7144

SPECIFICATION DATA SHEET

MODEL No. 3200

CONICAL SPIN-IN

Date: 10/07/09 rev.

Drawn by: M.D.C.

DIMENSIONAL DATA

SIZES AVAILABLE: 4" THROUGH 20"

CONICAL CONNECTION HOLE TO TRUNK DUCT
IS APPROXIMATELY 2" GREATER THAN
BRANCH DUCT DIMENSION.

5 3/8" LONG COLLAR.


FABRICATION DATA

MATERIAL:
HOT DIPPED GALVANIZED STEEL SHEET
PER ASTM-A653 CS TYPE B.

GAUGES:
4" THROUGH 8" = 28 GAUGE
9" THROUGH 14" = 26 GAUGE
16" THROUGH 20" = 24 GAUGE

FEATURES

CONTINUOUS WELD LONGITUDINAL SEAM FOR
NO AIR LEAKAGE @ 2" W.G. STATIC PRESSURE.

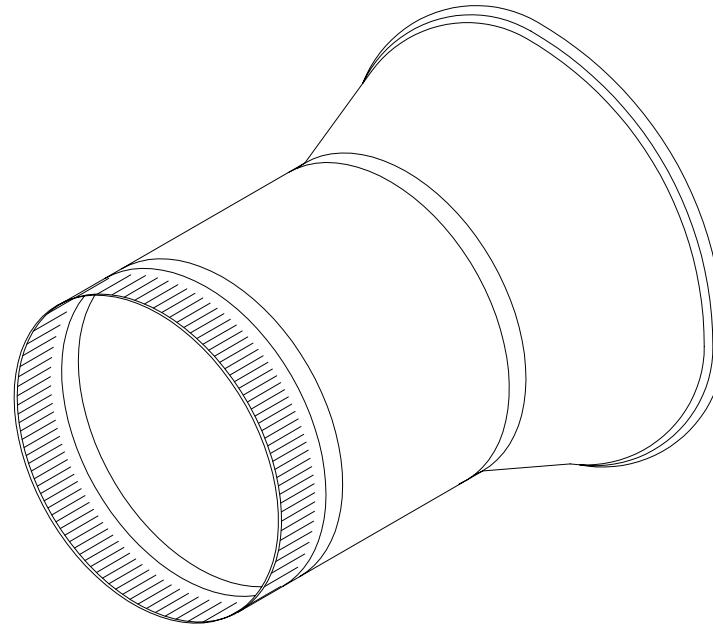

OPTIONS

No. 3200-D: CONICAL TAKEOFF WITH MANUAL
VOLUME DAMPER.
No. 3200-DS: CONICAL TAKEOFF WITH MANUAL
VOLUME DAMPER AND 2" DAMPER
HANDLE STANDOFF.

SPECIAL NOTES

NOTE BRANCH DUCT DIMENSION WHEN ORDERING.

MADE TO MEET S.M.A.C.N.A. GAUGE STANDARDS. MAXIMUM 2" W.G. STATIC PRESSURE SCHEDULE.
(S.M.A.C.N.A. HVAC DUCT CONSTRUCTION STANDARDS, SECOND EDITION - 1995)