



6390 Philips Highway  
Jacksonville, FL 32216  
Phone (904) 737-7144

## SPECIFICATION DATA SHEET

# MODEL No. 401

### STRAIGHT DUCT

Date: 09/12/07 rev.

Drawn by: B.H.C.

#### DIMENSIONAL DATA

BUILT TO DESIGN SPECIFICATIONS.

AVAILABLE IN 3FT., 4FT., & 5FT. LENGTHS.

#### FABRICATION DATA

##### MATERIAL:

FABRICATED FROM HOT-DIPPED GALVANIZED STEEL SHEET OF LOCK FORMING QUALITY PER ASTM A653 CS TYPE B.

##### GAUGES AVAILABLE:

28, 26, 24, 22, 20 AND 18 GAUGE.

BUTTON PUNCH SNAP-LOCK LONGITUDINAL SEAM IS STANDARD.

AVAILABLE WITH PITTSBURGH LOCK LONGITUDINAL SEAM.

TRANSVERSE BEADS SPACED ON 12" CENTERS.

#### FEATURES

##### INTERNAL INSULATION AVAILABLE:

1/2", 1" OR 1-1/2" THICK.

SHIPPED IN L-SECTIONS, READY FOR ASSEMBLY.


#### TRANSVERSE CONNECTIONS

ENDS STRAIGHT

FLANGES TURNED IN OR OUT

S-LOCK AND DRIVE

FLANGED BOLT TOGETHER

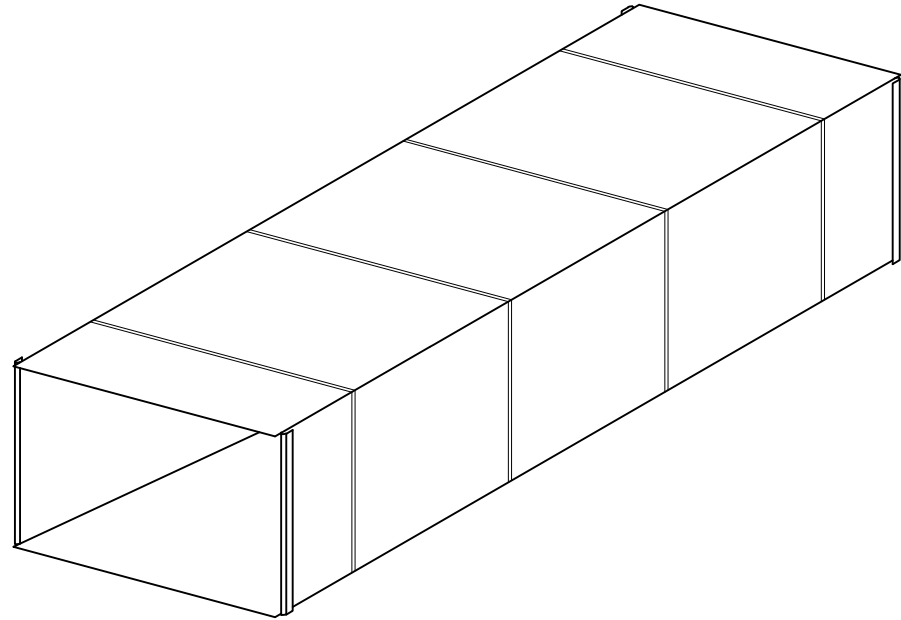

#### SPECIAL NOTES

AVAILABLE UPON REQUEST:

- 1) FABRICATED FROM .018" THICK (26 GA.) STAINLESS STEEL TYPE 304-2B (4 FT. JOINTS ONLY)
- 2) FABRICATED FROM .025" THICK OR .032" THICK ALUMINUM SHEET 3003 H-14 ALLOY (4 FT. JOINTS ONLY)